

**ROTARY SWITCH SETTINGS**

**WIRING TYPES**

- 0 C2 WIRING**
- 1 B2 WIRING**
- 2 D1 WIRING**
- 3 E2 WIRING**
- 4 T WIRING**
- 5 TS WIRING**


**PROGRAM SETTINGS**

- 6 MID-STOP TIMER TO CLOSE**
- 8 WARNING LIGHT TIMER**
- 9 SBC SINGLE BUTTON CONTROL**
- B TIME TO CLOSE**
- C MID-STOP**
- D RUN-TIMER**

**CONNECTION FOR A RADIO RECEIVER MODULE (CONSULT FACTORY)**

TBS 24VAV . . . . . GND

**NOTE:**  
FOR ROTARY SWITCH SETTINGS SETTINGS AND PROGRAMMING PROCEDURES, REFER TO INSTRUCTION MANUAL

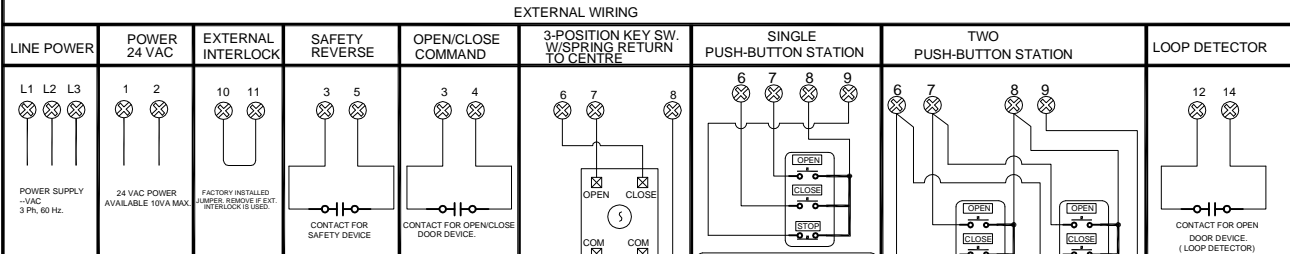

**WARNING**

① - USE 18AWG OR HIGHER FOR WIRING ALL EXTERNAL CONNECTIONS

② - MOTORISED DOORS CAN CAUSE SERIOUS INJURIES OR DEATH. MANARAS STRONGLY RECOMMENDS THE USE OF ENTRAPMENT PROTECTION SYSTEMS, ESPECIALLY IN THE OF CASE MOMENTARY CONTACT TO CLOSE AS IN B2 WIRING

THE INFORMATION CONTAINED HEREIN IS PROPRIETARY TO MANARAS-OPERA AND SHALL NOT BE REPRODUCED OR DISCLOSED OR USED FOR ANY DESIGN OR MANUFACTURE EXCEPT WHEN USER POSSESSES DIRECT WRITING AUTHORIZATION FROM MANARAS-OPERA

**TITLE: WIRING DIAGRAM, 208/480/600VAC, 3- PHASE**

DRAWN BY: BP DATE: 21.JAN.2011 CAD FILE: EDWG1307006602 REV: C DATE: 02.NOV.2012

MANARAS-OPERA  
436 ONEIDA DRIVE  
POINTE-CLAIRE, QC H9R 1A8  
TEL: 1-800-361-2260  
FAX: 1-888-626-0606

