

WARNING

TO REDUCE THE RISK OF SEVERE INJURY OR DEATH TO PERSONS:

1. READ AND FOLLOW ALL INSTALLATION INSTRUCTIONS.
2. Always shut OFF the main power before performing any electrical intervention.
3. Manaras-Opera recommends the use of this kit ONLY on operators installed on counterbalanced doors.
4. DO NOT INSTALL OR USE this kit on non-counterbalanced door operators.

Kit Installation

Refer to Figure 1 and Figure 2:

1. Attach the GREEN rope (via a knot) to the shorter part of the lever.
2. Attach the RED rope (via a knot) to the longer part of the lever.
3. Make sure that the knots (and rope) do not interfere with the proper operation of the reducer or with the reducer's black cover when engaging or disengaging.

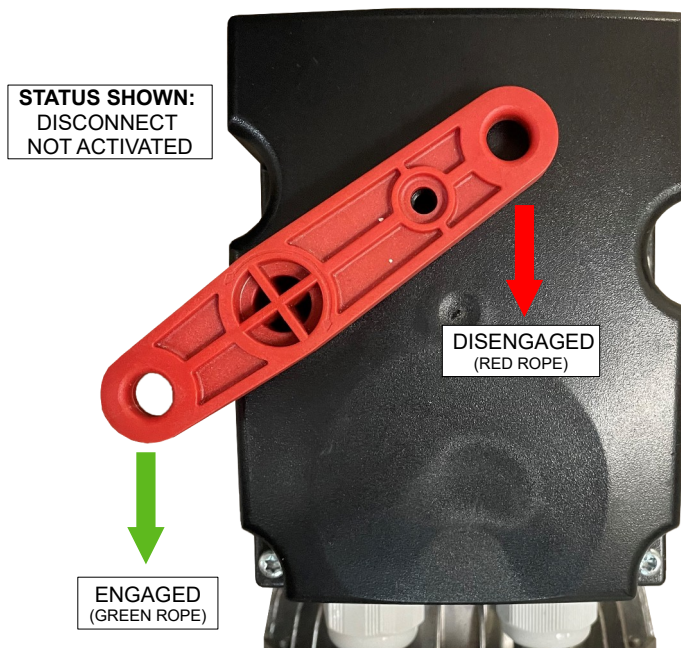


Figure 1- Disconnect Lever Mechanism

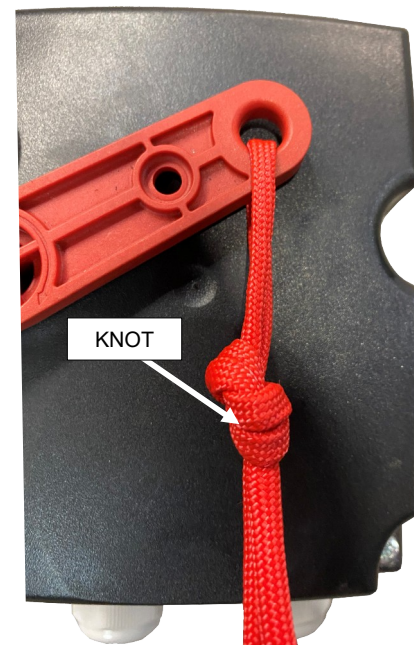


Figure 2 - Knot Example

Operation

1. Pulling the RED rope handle DISENGAGES the reducer. Direct manual operation of the door is possible.
2. Pulling the GREEN rope handle ENGAGES the reducer. The operator is ready for normal electrical operation.
3. The system guarantees stable lever positioning once the system is disengaged or engaged (no spring return or other mechanism required).